



Airy



Now available in:

40-inch

NEW
56-inch

48-inch

Your comfort matters, above all.

Turn on KDK Airy and turn on the comfort, with powerful airflow and lights that can be dimmed to suit your mood - all wirelessly controlled from your phone!




New 3D
Blade


Wifi
Control



Dimmable
LED Light*



*Dimmable LED Light is only applicable for F40GP, E48GP and H56GP models.

INDEX

The New KDK Airy
with Wi-Fi Control

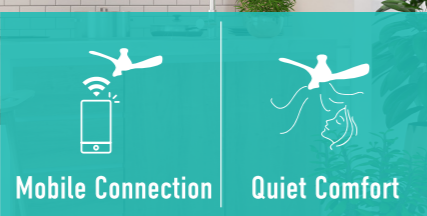

All visuals are for illustration only

INTELLIGENCE

(Applicable for F40GP, E48GP, E48HP and H56GP)




**Smart Control Fan via
KDK Ceiling Fan App**

By utilizing the KDK Ceiling Fan mobile application, all functions can be operated on the mobile phone. Inside the application, besides basic functions like turning the ceiling fan on and off, you can also customize the air delivery, LED lighting, and even setting a timer to suit your needs.



**Wi-Fi Connection
Mobile Application Control**

In the user-friendly interface of the KDK Ceiling Fan mobile application, all settings for the speed, timer and mode selection can easily be found and controlled. This provides user, a convenient air experience, with simple operations.



03

INTELLIGENCE



14

CONTROL



30

COMPARISON



08

RELIABILITY



15

PRODUCT
INFORMATION



11

PERFORMANCE



29

SPECIFICATION



Grouping

Synchronise control of up to 8 ceiling fans at the same time

Fan Speed

Adjust the fan speed as needed

LED Light*

Seamless brightness control on LED Light and Night Light Mode based on user preference

Scene Setting*

4 preset scene settings of preferred brightness and colour temperature available

1/f Yuragi

A fluctuating pattern that mimics natural and gentle breeze, bringing comfortable airflow to keep the body calm and relaxed



ON & OFF Timer

Set timer to turn on or off the fan

Schedule

Set multiple schedules of custom fan operations to suit daily activities

Sleep Mode

Gradually reduce the fan speed until the fan is turned off

Reverse

Draw cool air upwards to circulate around the room, helping to maximize the effectiveness of the air conditioner

Grouping Function (Applicable for F40GP, E48GP, E48HP and H56GP)


Grouping function is available in the KDK Ceiling Fan App. It enables you to synchronize control of up to 8 registered ceiling fans. After synchronizing multiple ceiling fans as a group, operations such as turning on and off, setting fan speed, and adjusting lighting can be applied to all ceiling fans in the same group. Multiple groups can also be set for ease of management.



Scheduling (Applicable for F40GP, E48GP, E48HP and H56GP)


Scheduling function is available in the KDK Ceiling Fan App. For the registered ceiling fans, you can schedule to turn on and off, pre-set fan speed and lighting at any time, for any day of the week.

Multiple schedule setting can be done to suit daily activities.

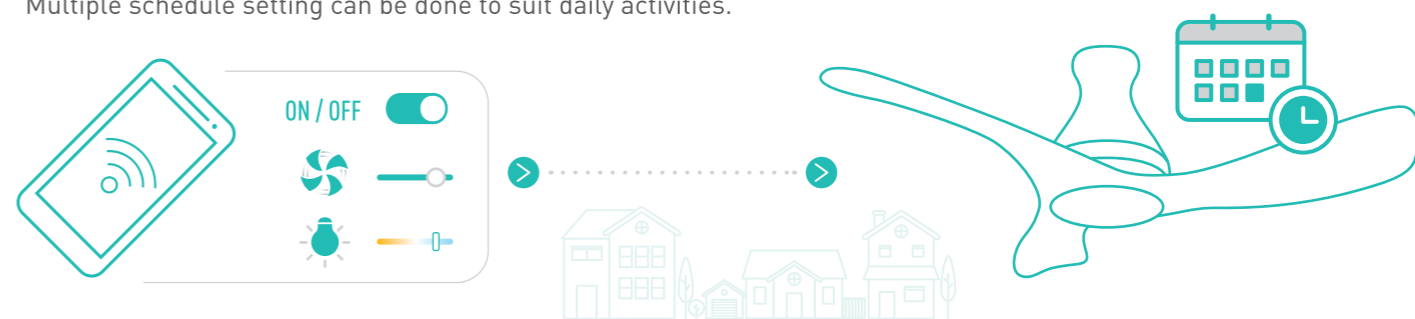

Reverse Function (Applicable for F40GP, E48GP, E48HP and H56GP)

Reverse function is available in the KDK Ceiling Fan App. It rotates the ceiling fan in a clockwise motion and draws cool air upwards to circulate the air around the room for even air distribution and comfortable temperature. The reverse function complements with the functions of an air conditioner and helps to maximize the effectiveness of the air conditioner.

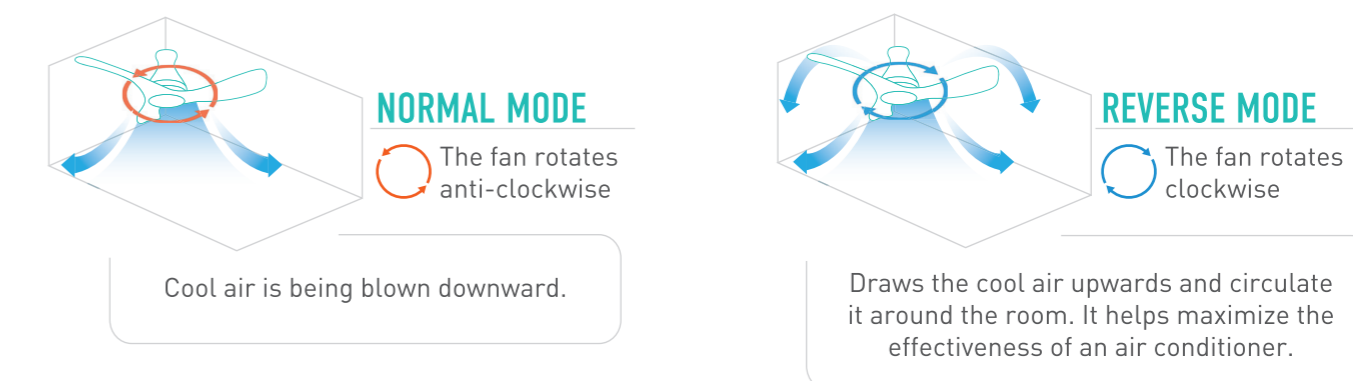

*Not applicable for E48HP

LED Lighting (Applicable for F40GP, E48GP and H56GP)



85% Energy Saving*

* LED Light compared to incandescent bulb

Hassle-free

LED light lasts a longer life than a regular bulb. It saves the hassle of replacing it frequently and reduces waste.


It is also considered energy saving for its long lifespan. Moreover, LED ceiling fan incorporates lighting into a fan that frees up more ceiling spaces.



Warm



White



Night Light



Brightness

Brightness = Up to 200 lx



Energy Efficient

19W LED light = Incandescent lamp 4 x 60W



Coverage


[HIGH] - 200lx
1) 4m coverage - strong lighting
2) 6m coverage - moderate lighting
3) 8m coverage - weak lighting

Adjustable Color Temperature (Applicable for F40GP, E48GP and H56GP)

NORMAL LIGHT MODE

Min: 25(lx)
Max: 200(lx)


WARM

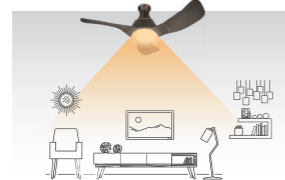

MIX (WARM WHITE)




WHITE (COOL DAYLIGHT)



Min: 0.15(lx)
Med: 0.60(lx)
Max: 1.10(lx)

NIGHT LIGHT MODE

WARM

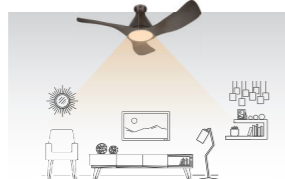

Preset Lighting Scene Setting (Applicable for F40GP, E48GP and H56GP)

User can preset 4 light settings for 4 common daily activities. The preset scene can also be overwritten by adjusting the light setting according to your preferred comfort level; save the setting with easy 1-Touch access.

Work




Relax



Dine



Sleep

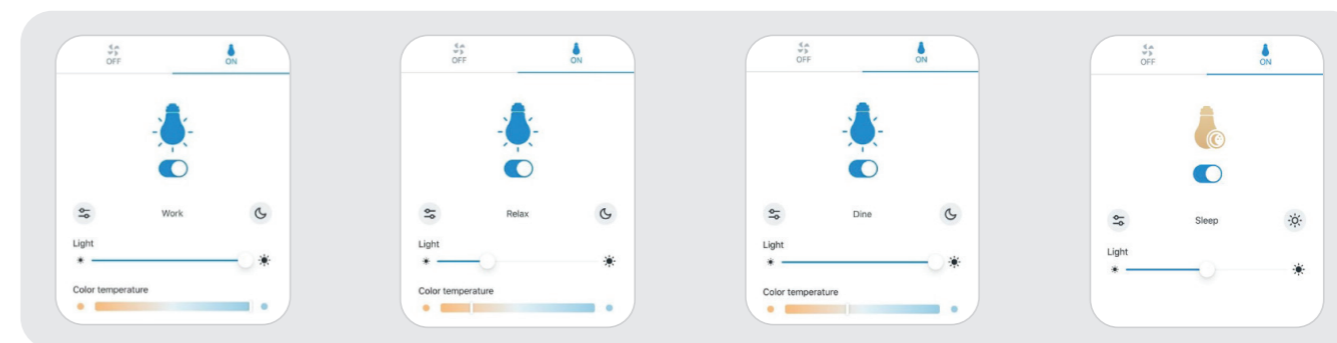

Innovative Blade Design (Applicable for F40GP, E48GP, E48HP and H56GP)




40" / 48" / 56"
3D Curve Blade

More Silent with Low Noise

The blade shape is like an owl's wings, designed to generate soft and silent airflow.

User can enjoy a relaxing and peaceful sleep under the silent airflow with reduced noise disturbance.

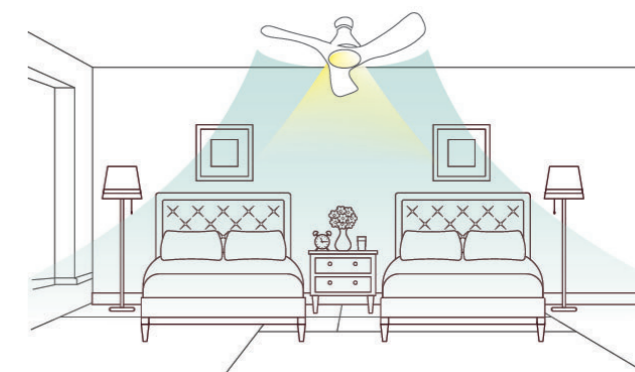


NEW BLADE

3D Curve blade

Blade tip moves in advance to the rotational direction and does not cut air at same time as the rest of the blade does.

Blade turns gradually that causes small pressure change to create smooth and quiet airflow.

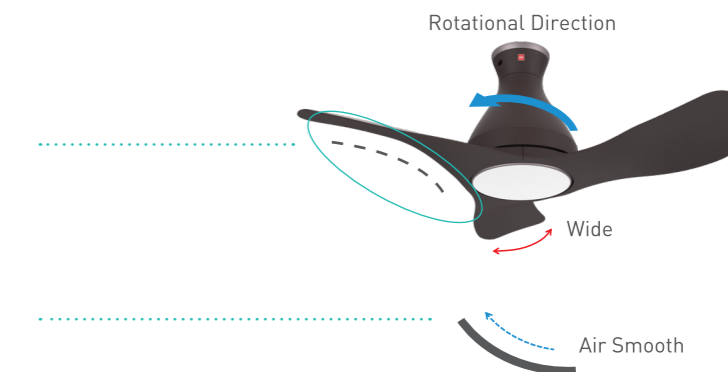


NORMAL BLADE

Straight Blade

The whole body of the blade cuts air at the same time.

Blade angle & width are narrow and at the same angle.

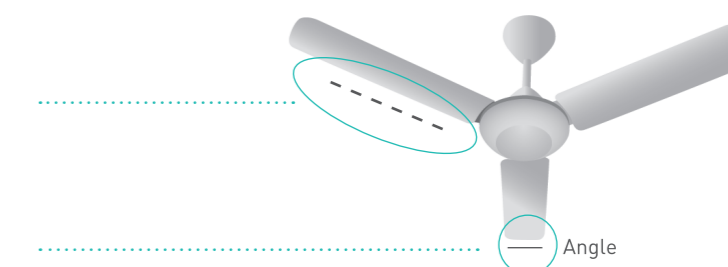


RELIABILITY

High Reliability is Important For You

Potential Safety Problems

Various factors may cause damage to the fan, and cause the fan or its blade to fall.

- Defective Part Mixed
- Using Substitute Parts
- Wearing of Fasteners
- Incorrect Installation
- Fatigue of Material

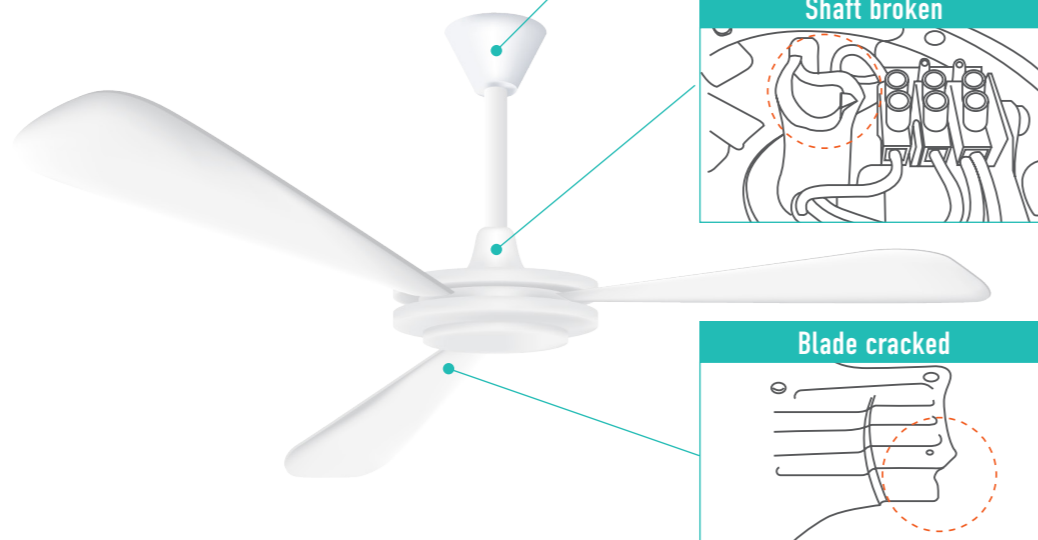

Singapore Safety Mark

Singapore KDK models that come with Capital Distributors warranty are registered with Singapore Consumer Protection (Safety Requirements) Registration Scheme, which certifies that our products meet stringent safety standards and are safe for use in your home.




Safety Policy By KDK

Preventive Measures For Premium Safety

KDK's safety policy prevents any dangerous misuse of parts, KDK ceiling fans are equipped with our Patented Safety Design.

PATENTED
ENHANCED
SAFETY DESIGN

Different safety features are patented in some countries

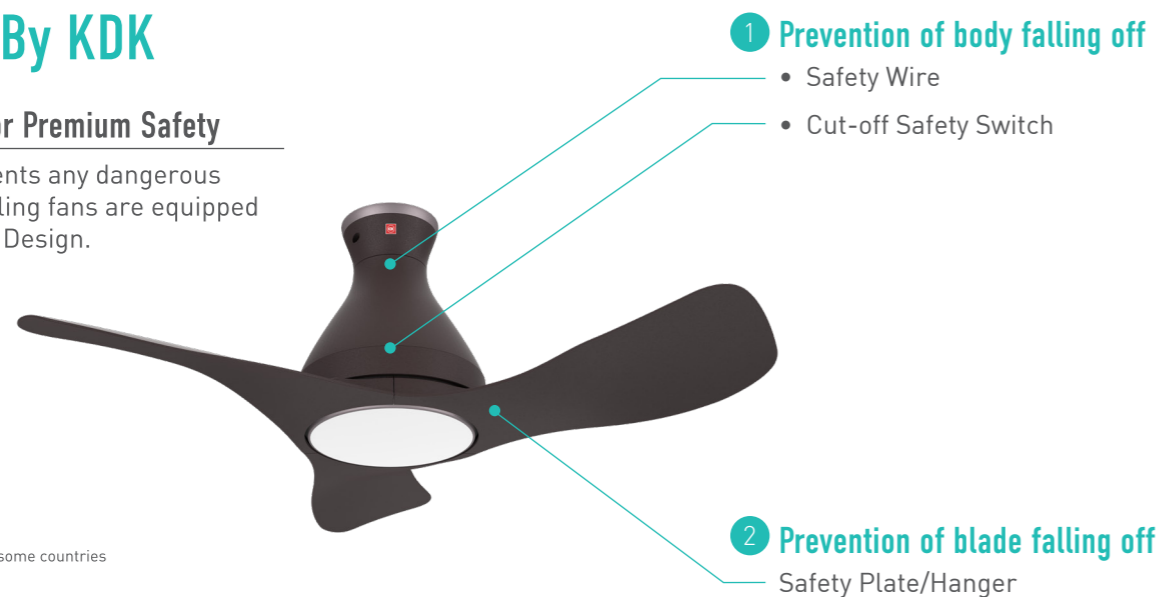

A New Dimension of Protection Secure Your Safety Wholly



Cut-off Safety Switch

Problem

If the shaft or bolt is damaged, the fan will wobble abnormally during operation. Continuing to operate the fan will cause further damages, eventually causing the shaft or bolt to break.

Our Solution

A cut-off safety switch will automatically shut off the power supply if the shaft or bolt exhibits signs of wear and tear. In the event of abnormal wobbling, the fan will shut off and the lever will detach from the switch to prevent further damage. This minimizes the possibility of the fan falling.

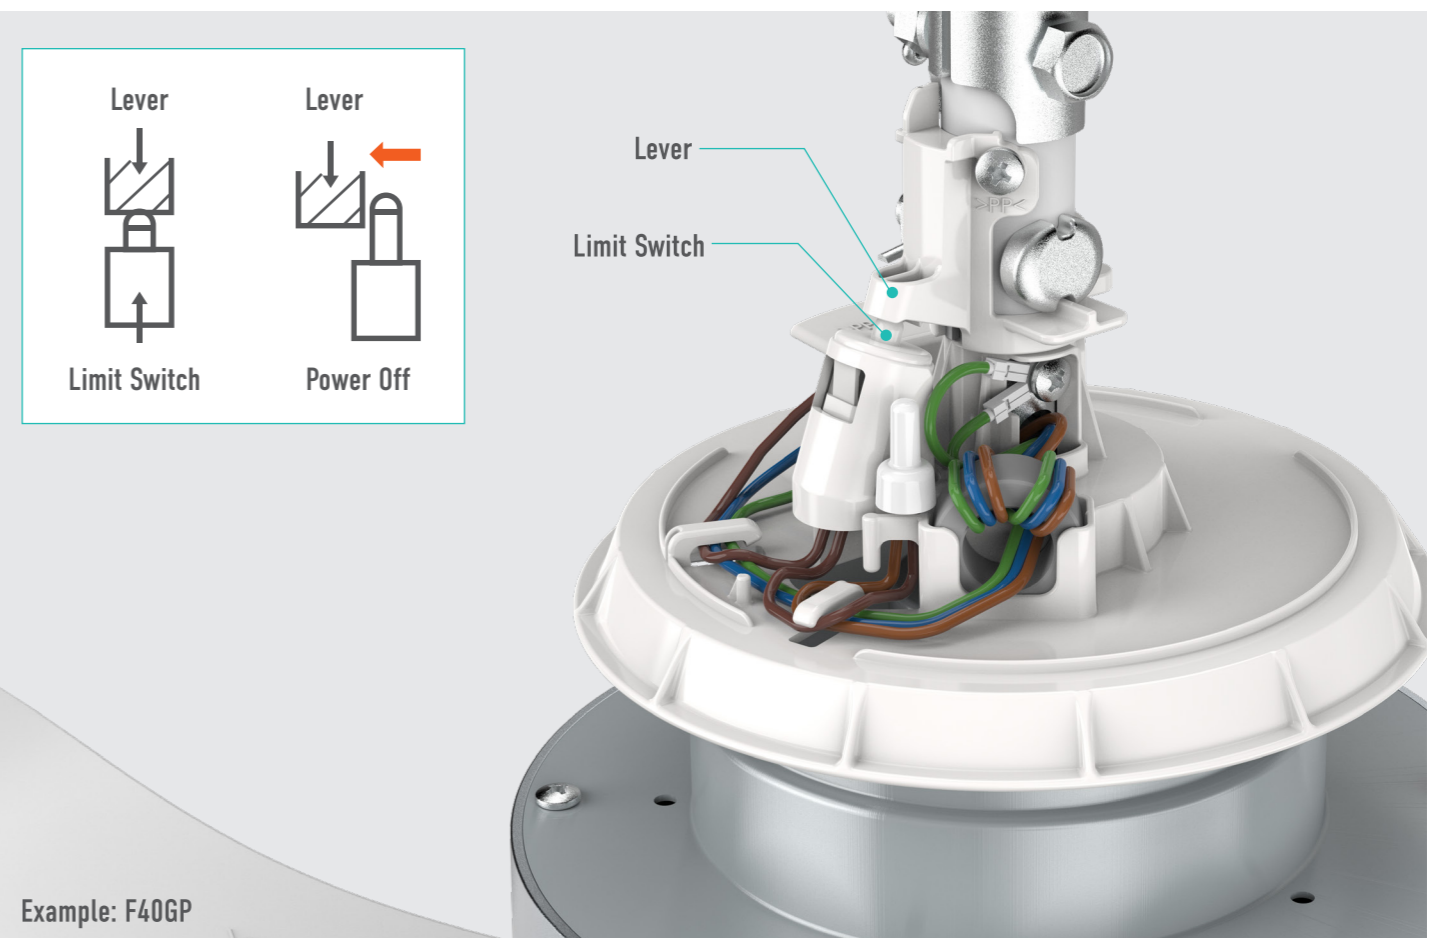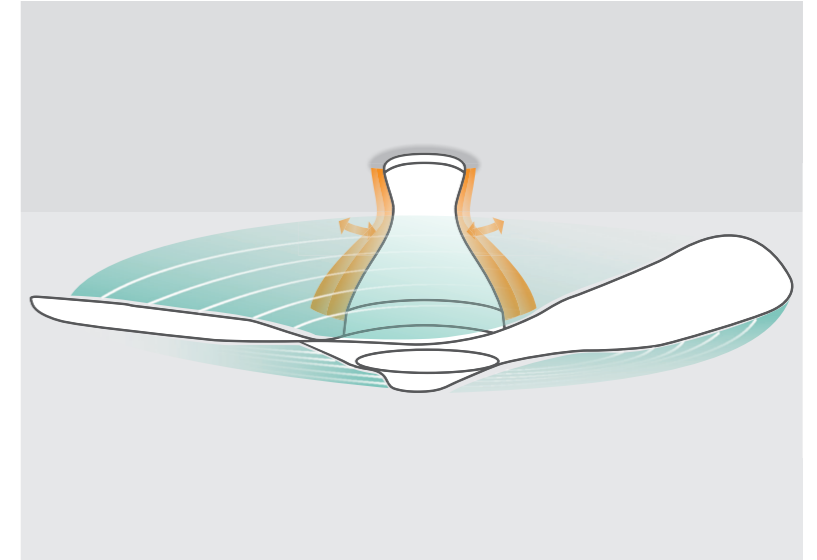


Blade Safety Plate

Problem

Blade fins may fall off from the fan motor due to material fatigue.

Our Solution

An exclusively designed fall prevention plate is equipped. The mechanism prevents blades from falling due to damage.

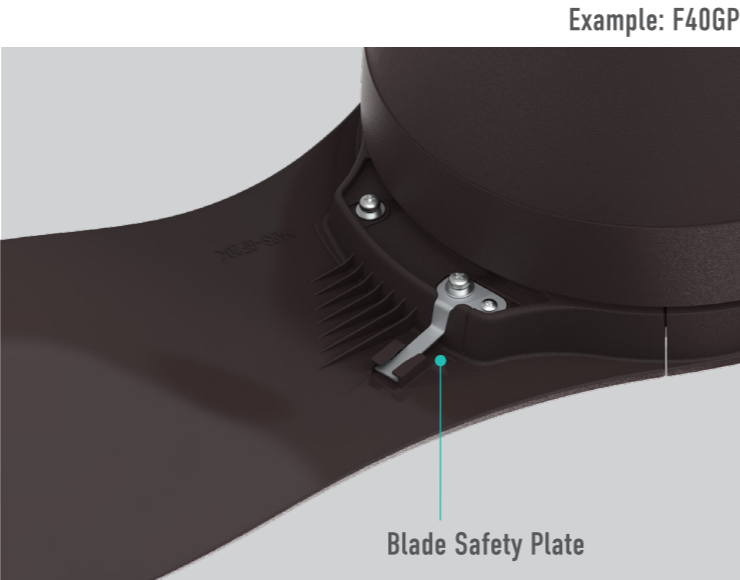

Safety Wire

Problem

The fan motor may fall from the pipe rod on accident due to various factors, such as wear on the shaft bolt.

Our Solution

A safety wire is used to secure the fan motor with the ceiling hook so the motor will not fall from the pipe rod when the motor is detached from it.




PERFORMANCE

DC MOTOR Direct Current Motor

Newly developed direct current (DC) motor is adopted in these fans. Power consumption is reduced compared to Alternating Current (AC) motor, resulting in higher energy saving.


DC motor has lighter weight compared to conventional AC motor, allowing easy handling for DC ceiling fan.

DC Direct Current (DC) Motor

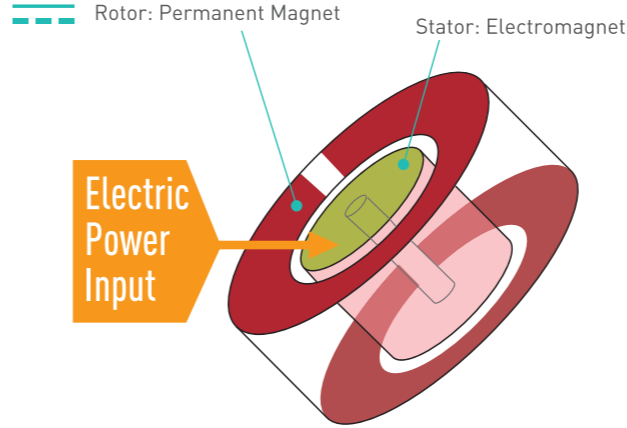

Electric power input is required for stator only

AC Alternating Current (AC) Motor

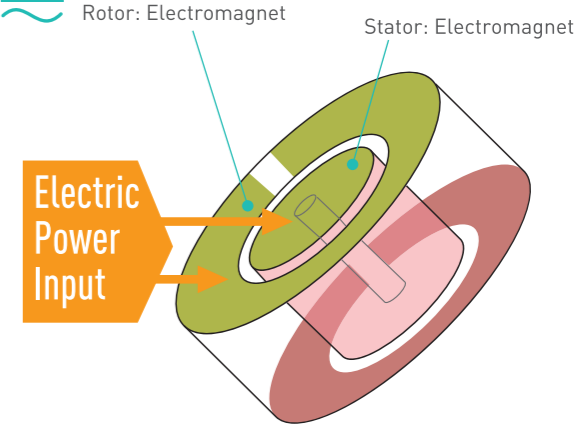

Electric power input is required for stator only

	Motor Type	Power Consumption (W)
F40GP	DC	31
Other Brand	AC	94
		67% reduced

As of 230V 50Hz

Auto Mode with Eco Mode Function (T60AW)

T60AW is equipped with temperature sensor. Incorporated with Eco Mode Function, the innovative Auto Mode function is enhanced. This function allows the fan to generate the most comfortable air velocity to the human body, subject to the room temperature.

The sensor monitors the surrounding temperature change and varies air velocity automatically in accordance to below table.


Range of Room Temperature	Change of Room Temperature		Change of Speed T60AW	
	-1°C	+1°C	-	+
Above 30°C	Blue bar	Red bar	Blue bar	Red bar
30°C - 29°C	Blue bar	Red bar	Blue bar	Red bar
29°C - 24°C	Blue bar	Red bar	Blue bar	Red bar
Below 24°C	Blue bar	Red bar	No Change	

Speed change for Eco Mode is among speed 1 to speed 9





Our sophisticated formula - 1/f Yuragi - varies air velocity & wind force. The fluctuating pattern presents you with a peaceful and comfortable breeze. This type of technology-based rhythm keeps you feeling relaxed without drawing too much heat away from your body.

	Effect on Body Temperature	Feeling
With 1/f Yuragi function	Decent body temperature is maintained under the stimulation a natural breeze.	Near the nature wind <ul style="list-style-type: none">• Changes in the wind velocity gives a natural feeling.• Feels calming even after a long time usage.
Without 1/f Yuragi function	Body temperature starts to drop after exposing to constant wind over a period of time.	Human made wind <ul style="list-style-type: none">• Constant wind velocity might result in anxious feelings.

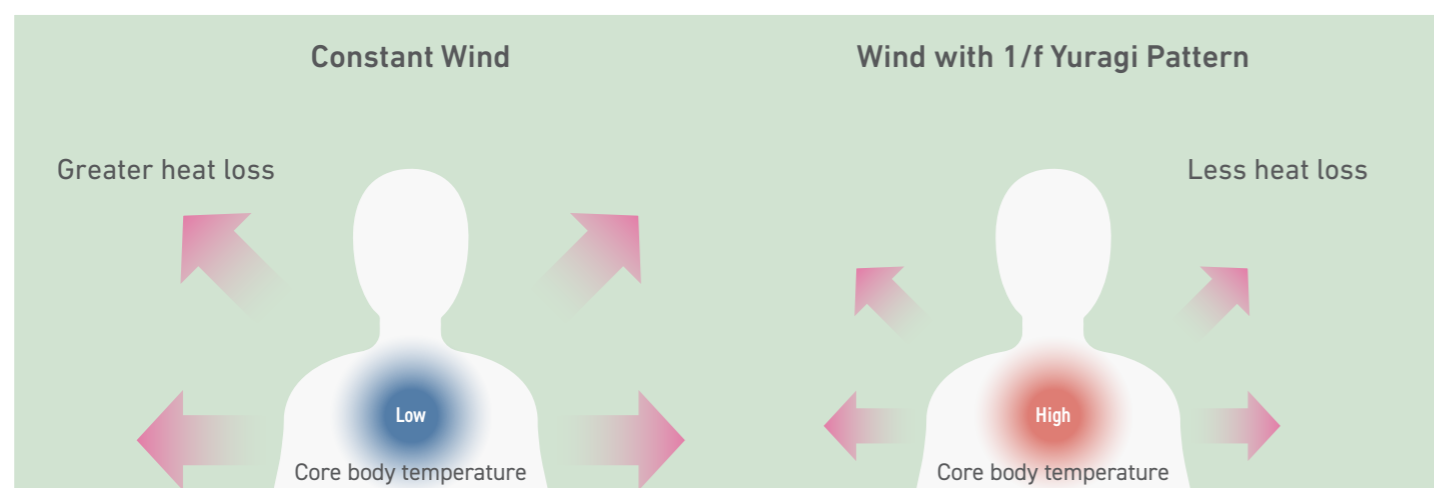

With the exclusive and unique 3D blade design, it provides a smooth and strong air flow while maintaining operating noise at a low level.

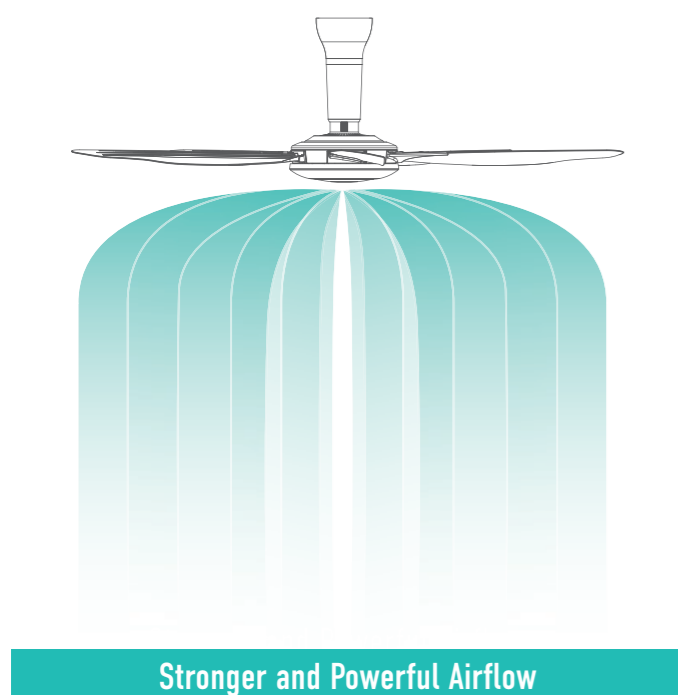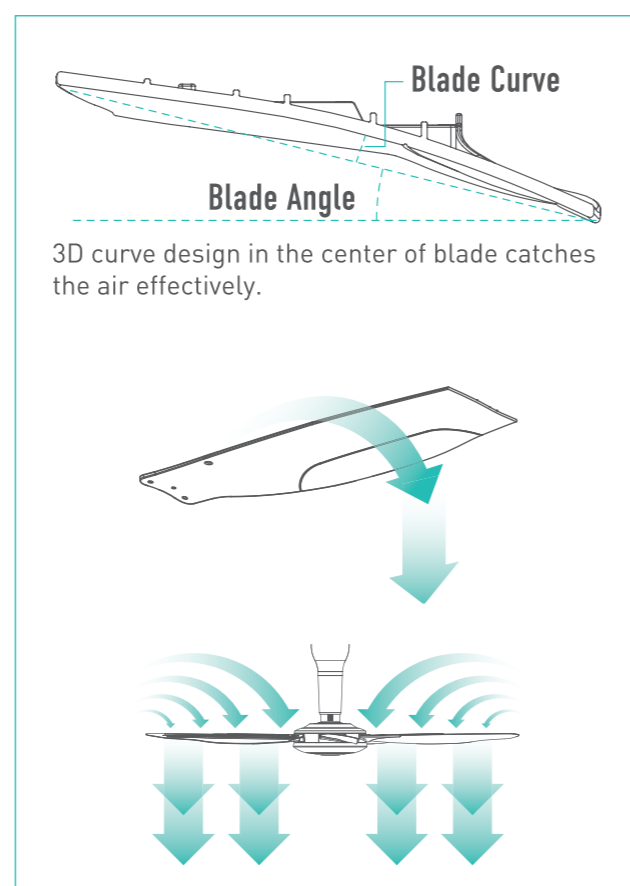

The fans are equipped with Sleep Modes, which gradually reduce the fan speed until the fan is switched off. This function not only creates an optimal sleeping environment for you, but also enhances energy saving.

Example: T60AW(Speed 9 & Speed 6)

Sleep Mode

(Example for Speed 9 & Speed 6)




Note:

1. Sleep mode function is disabled at speed 1 and 1 hour Off timer setting.
2. Operation patterns will be subjected to different models. Please refer to the operation instruction for details.



On-timer can be leveraged by strategically turning on the fan at the designated time when the air conditioner is set to stop. This can keep the room temperature comfortable while achieving energy saving.

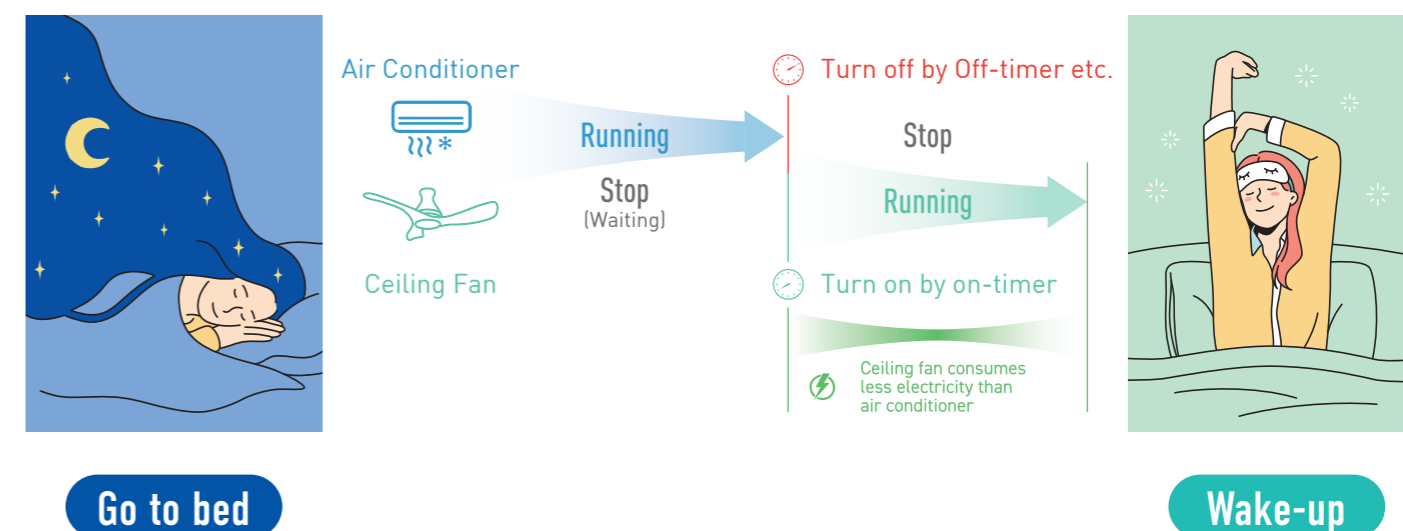

CONTROL

The remote control provides users greater convenience when using the ceiling fan. There are two types of remote controls: Wireless and wired regulator.

Wireless Remote Control Type

For remote control infrared type, different functions can be operated by the hand held remote controller unit. With the LCD display (depending on models), you can recognise the setting at a glance conveniently. Models with LED light on/off button. Additionally, F40GP, E48GP and H56GP allow you to adjust the LED brightness on the same remote control.

Example: F40GP remote control

OFF / ON Button

To activate or deactivate the ceiling fan

Speed Button

To adjust the fan speed between level 1 to 10

Reverse Button

To change the direction of fan rotation (clockwise or anti-clockwise)

Night Light Button

To select Night Light setting

Color Temperature Button

To adjust the color temperature of the LED light

Brightness Button

To adjust the brightness of the LED light

Light OFF/ON Button

To turn on or off the LED light


Wi-Fi Button

To activate or deactivate the ceiling fan wireless network

Regulator Control Type

On/Off and speed notch can be selected by simply adjusting the rotary switch of the wall-mounted regulator.

Example: M48SG

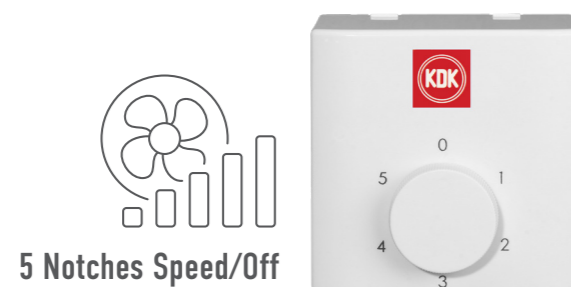

PRODUCT INFORMATION

Direct Current (DC) Motor,
Mobile App Control Type


F40GP 100cm (40")



Features

- Dual function: Fan and Light
- Direct current (DC) motor adopted
- 1/f Yuragi function
- 3D blade delivers smooth and strong airflow
- ABS-G (ABS reinforced with fibre glass) Blade material for durability
- Adjustable LED brightness & colour
- Wi-Fi and mobile app control
- Infrared remote control
- Reverse function
- 10-speed control
- Sleep mode with On timer & Off timer
- Schedule & Grouping function
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached
- Color: Brown or Matte White

Dimensions

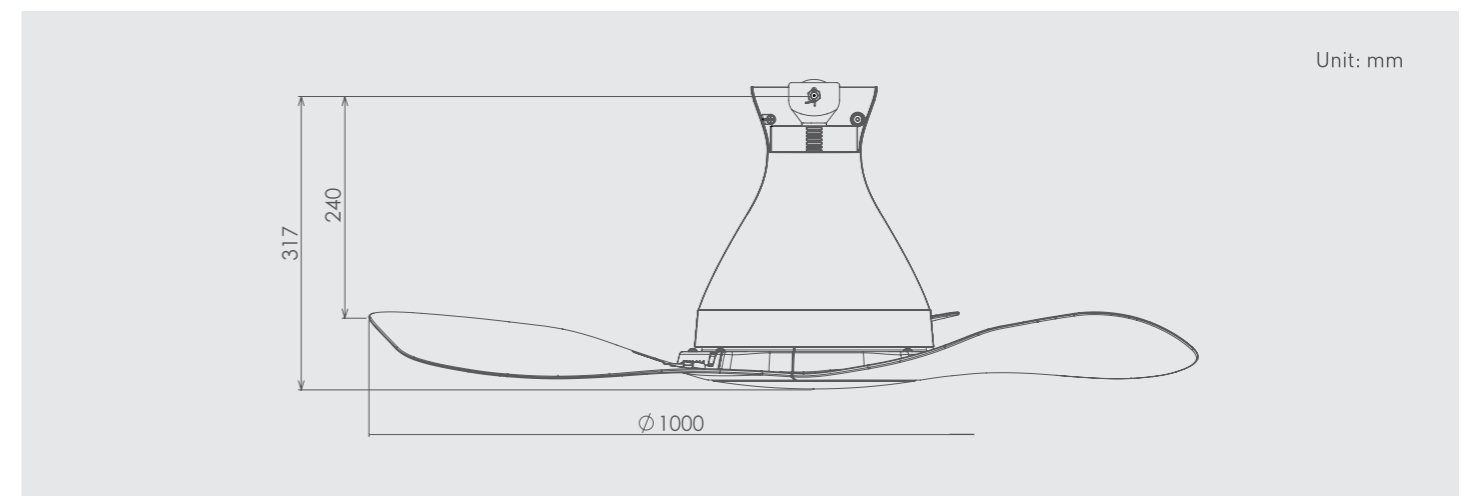

Specifications

Model No.	Voltage		*	Consumption [W]		RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]		Fan	Fan+Light		[m/min]	[ft/min]	[m³/min]	[ft³/min]	
F40GP	230	50	Hi	31	50	235	220	722	155	5474	5.2

*Hi - Notch 10

PRODUCT INFORMATION

Direct Current (DC) Motor,
Mobile App Control Type

E48GP 120cm (48")



Features

- Dual function: Fan and Light
- Direct current (DC) motor adopted
- 1/f Yuragi function
- 3D blade to deliver smooth and strong airflow
- ABS-G (ABS reinforced with fibre glass) Blade material for durability
- Adjustable LED brightness & color
- Wi-Fi and mobile app control
- Infrared remote control
- Reverse function
- 10-speed control
- Sleep mode with On timer & Off timer
- Schedule & Grouping function
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached
- Color: Brown or Matte White


E48HP 120cm (48")



Features

- Direct current (DC) motor adopted
- 1/f Yuragi function
- 3D blade to deliver smooth and strong airflow
- ABS-G (ABS reinforced with fibre glass) Blade material for durability
- Wi-Fi and mobile app control
- Infrared remote control
- Reverse function
- 10-speed control
- Sleep mode with On timer & Off timer
- Schedule & Grouping function
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached
- Color: Brown or Matte White

Dimensions

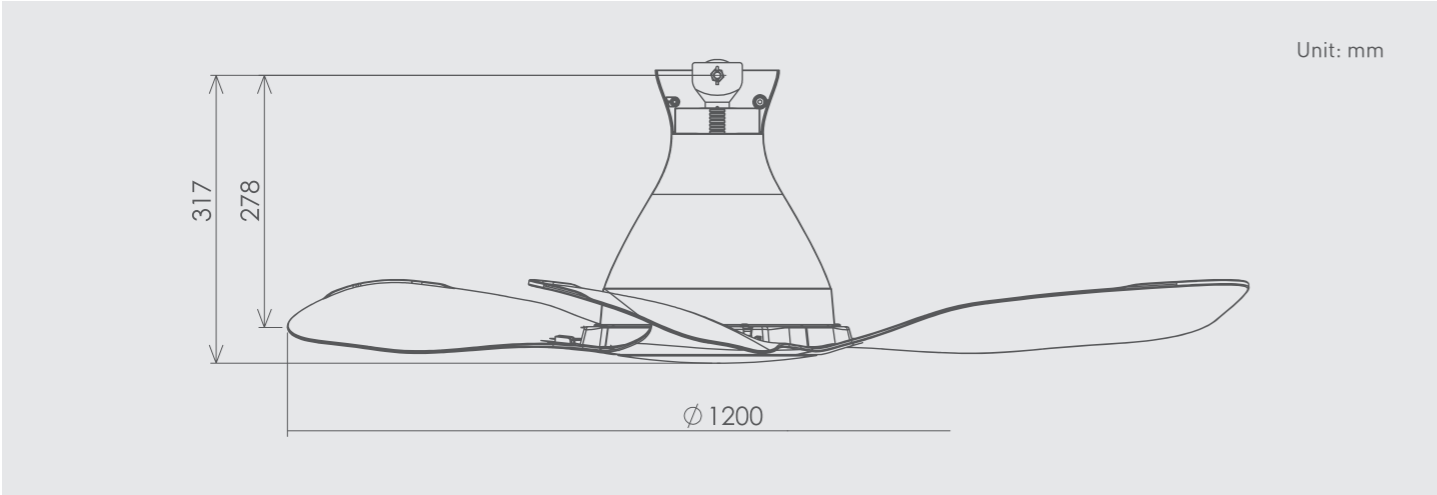


Specifications

Model No.	Voltage		*	Consumption [W]		RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]					[m/min]	[ft/min]	[m³/min]	[ft³/min]	
E48GP	230	50	Hi	Fan 31	Fan+Light 50	170	185	607	200	7063	5.5

*Hi - Notch 10

Dimensions

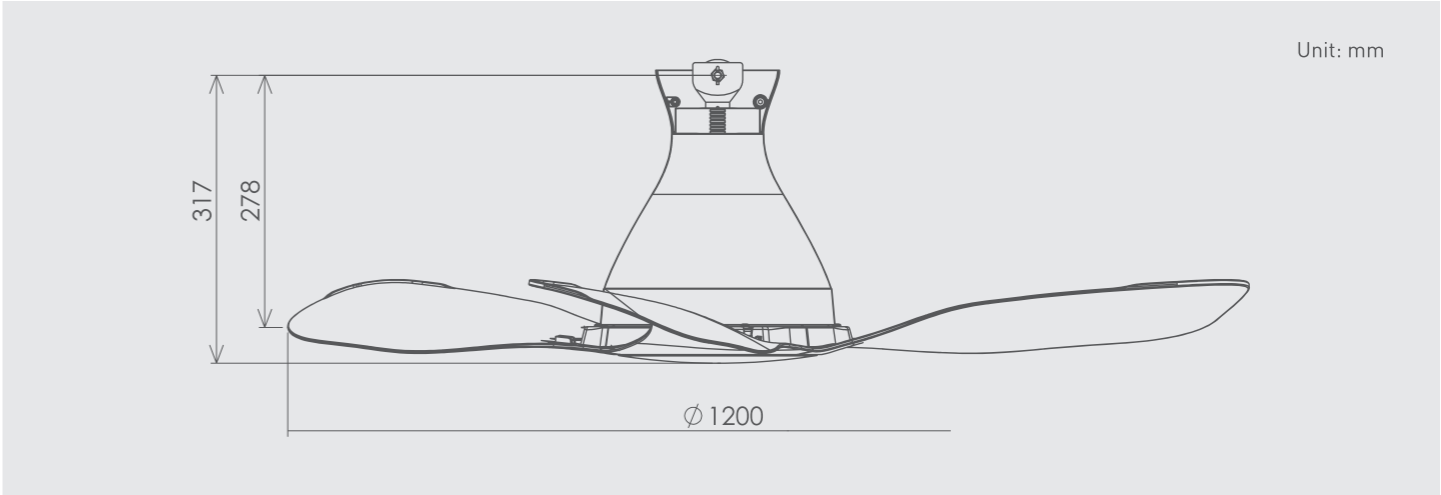

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
E48HP	230	50	Hi	31	170	185	607	200	7063	5.2

*Hi - Notch 10

PRODUCT INFORMATION

Direct Current (DC) Motor,
Mobile App Control Type


H56GP 140cm (56")



Features

- Dual function: Fan and Light
- Direct current (DC) motor adopted
- 1/f Yuragi function
- 3D blade to deliver smooth and strong airflow
- ABS-G (ABS reinforced with fibre glass) Blade material for durability
- Adjustable LED brightness & color
- Wi-Fi and mobile app control
- Infrared remote control
- Reverse function
- 10-speed control
- Sleep mode with On timer & Off timer
- Schedule & Grouping function
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached
- Color: Brown or Matte White

Dimensions

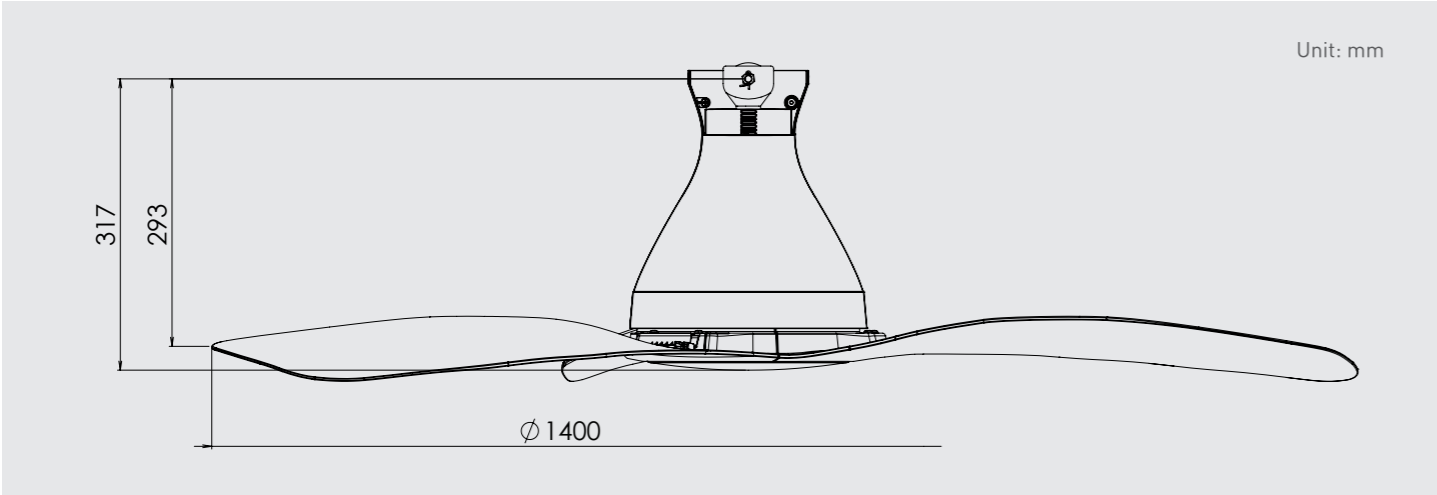

Specifications

Model No.	Voltage		*	Consumption [W]		RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]					[m/min]	[ft/min]	[m³/min]	[ft³/min]	
H56GP	230	50	Hi	Fan 53	Fan+Light 72	200	210	689	255	9005	6.8

*Hi - Notch 10

PRODUCT INFORMATION

Direct Current (DC) Motor,
Wireless Remote Control Type


W56WV 140cm (56")



Features

- Direct current (DC) motor adopted
- 1/f Yuragi function
- 3D blade to deliver smooth and strong airflow
- PPG (PP reinforced with fibre glass) Blade material for durability
- LCD wireless remote control
- 9-speed control
- Sleep mode with On timer & Off timer
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached
- Colour: Black, White

Dimensions

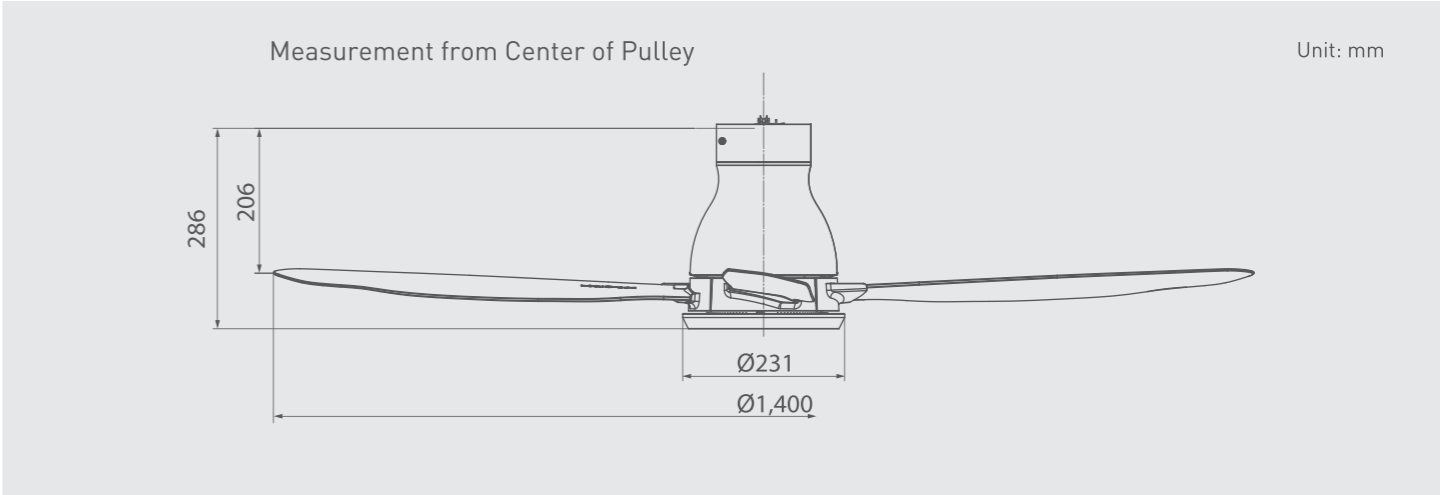

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
W56WV	230	50	Hi	39	228	180	591	220	7769	4.9

*Hi - Notch 9

PRODUCT INFORMATION

Direct Current (DC) Motor,
Wireless Remote Control Type

U60FW 150cm(60")



151416-12




1/2 yuragi

Features

- Dual function : Fan and Light
- Direct Current (DC) motor adopted
- Selectable light color (White/Daylight/Warm)
- 1/2 Yuragi Function
- 3D blade to deliver smooth and strong airflow
- PPG (PP reinforced with fibre glass)
Blade material for durability
- LCD wireless remote control
- 9-speed control
- Sleep mode with On timer & Off timer
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached
- Color: Black ,White
- Pipe length: Long or Short

Dimensions

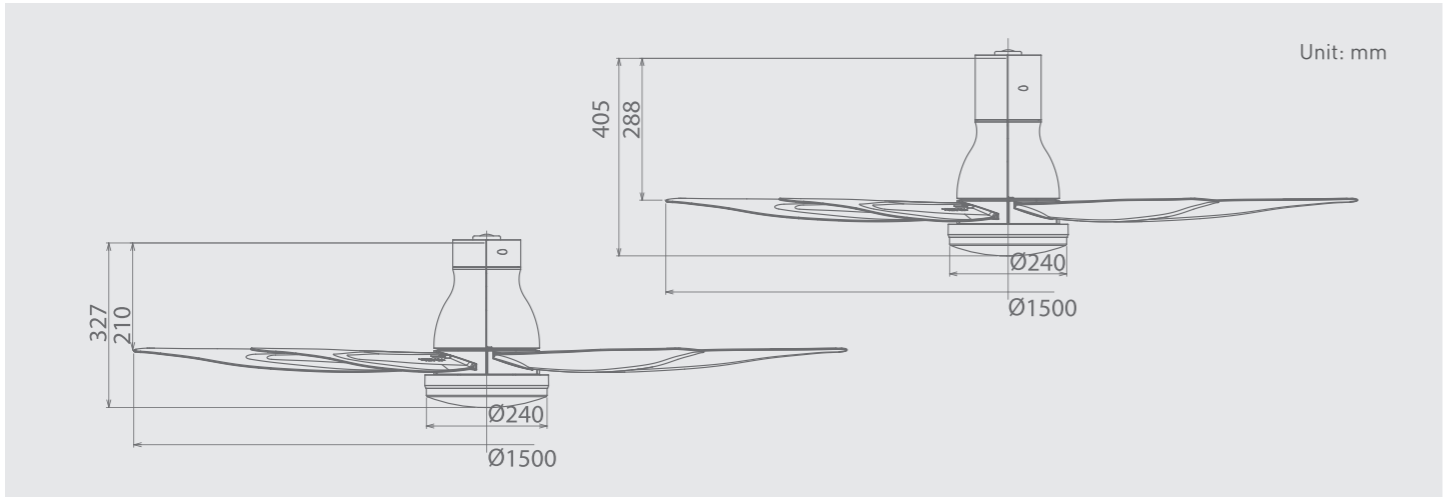

Specifications

Model No.	Voltage		*	Consumption [W]		RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]	
	[V]	[Hz]					[m/min]	[ft/min]	[m ³ /min]	[ft ³ /min]		
U60FW	230	50	Hi	Fan	Fan+Light	230	205	673	240	8176	Short Pipe	Long Pipe
				39	61						6.0	6.2

*Hi - Notch 9

U48FP 120cm(48")



151415-12




1/2 yuragi

Features

- Dual function : Fan and Light
- Direct Current (DC) motor adopted
- LED lighting with brightness for daily life
- 1/2 Yuragi Function
- 3D blade to deliver smooth and strong airflow
- PPG (PP reinforced with fibre glass)
Blade material for durability
- LCD wireless remote control
- 9-speed control
- Sleep mode with On timer & Off timer
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached
- Color option: Black or White

Dimensions

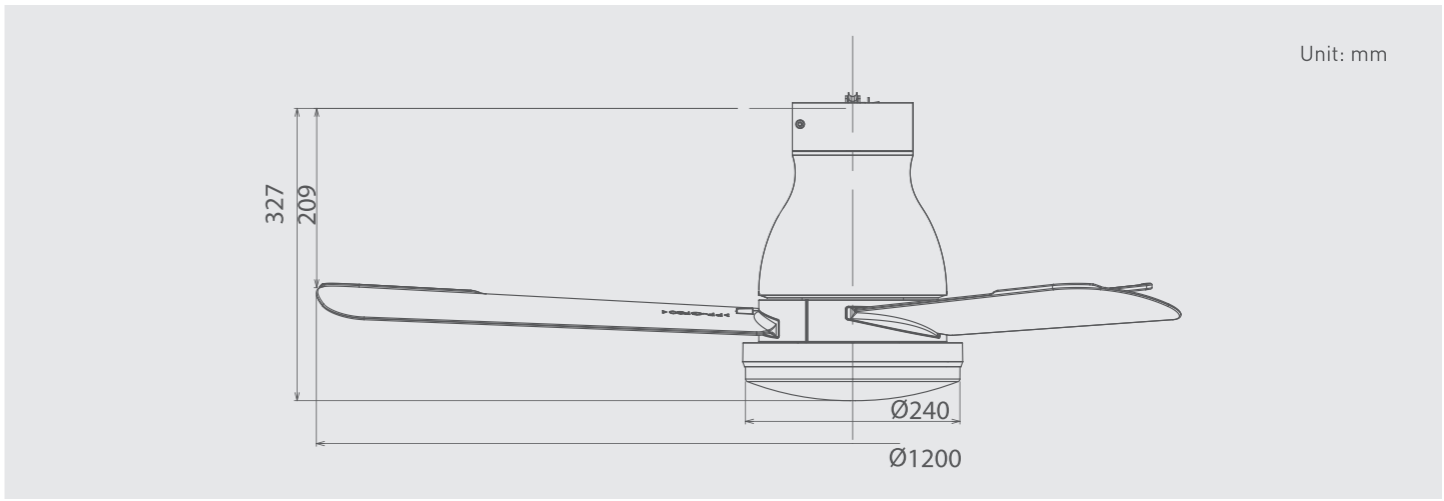

Specifications

Model No.	Voltage		*	Consumption [W]		RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]	
	[V]	[Hz]					[m/min]	[ft/min]	[m ³ /min]	[ft ³ /min]		
U48FP	230	50	Hi	Fan	Fan+Light	235	180	590	182	6427		4.9
				27	45							

*Hi - Notch 9

PRODUCT INFORMATION

Wireless Remote Control Type


T60AW 150cm(60")



Features

- Direct current (DC) motor adopted
- Auto mode with Eco Mode function by temperature sensor
- 1/f Yuragi function
- 3D blade to deliver smooth and strong airflow
- PPG (PP reinforced with fibre glass) Blade material for durability
- LCD wireless remote control
- 9-speed control
- Sleep mode with On timer & Off timer
- Cut-off safety switch equipped
- Blade safety plate and safety wire attached

Dimensions

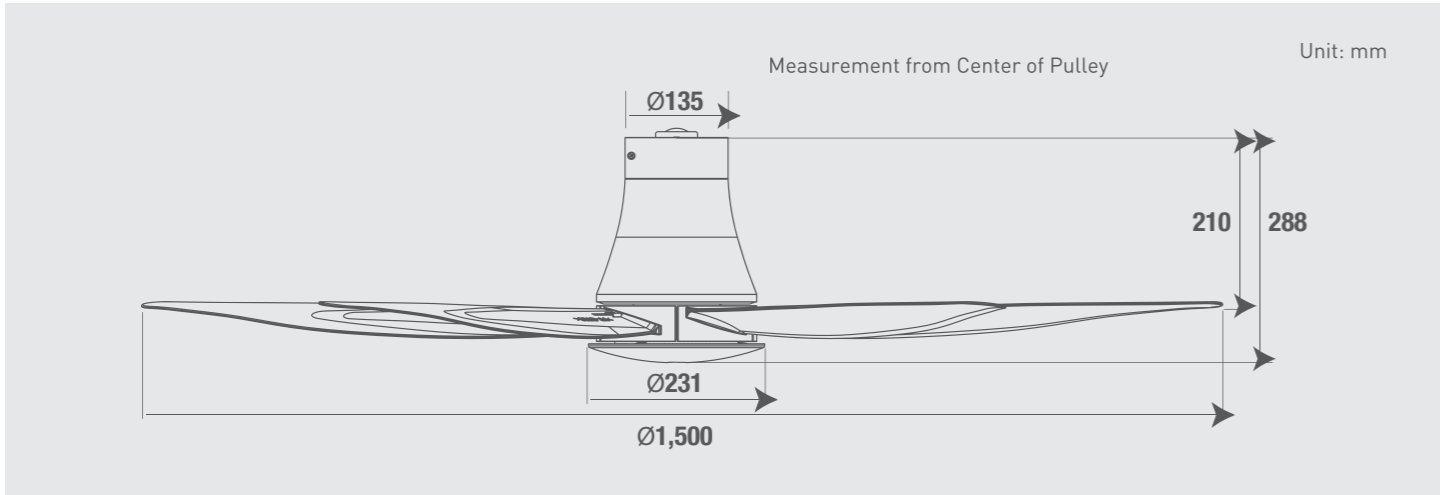

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
T60AW	230	50	Hi	39	230	205	673	240	8476	5.3

*Hi - Notch 9


Z60WS 150cm(60")



Features

- 1/f Yuragi function
- 3D blade to deliver smooth and strong air flow
- PPG (PP reinforced with fibre glass) Blade material for durability
- LCD wireless remote control
- 7 speed control
- Sleep mode
- 8-hour off timer
- Blade safety plate and safety wire attached
- Cut-off safety switch equipped
- Color option: Grey or White

Dimensions

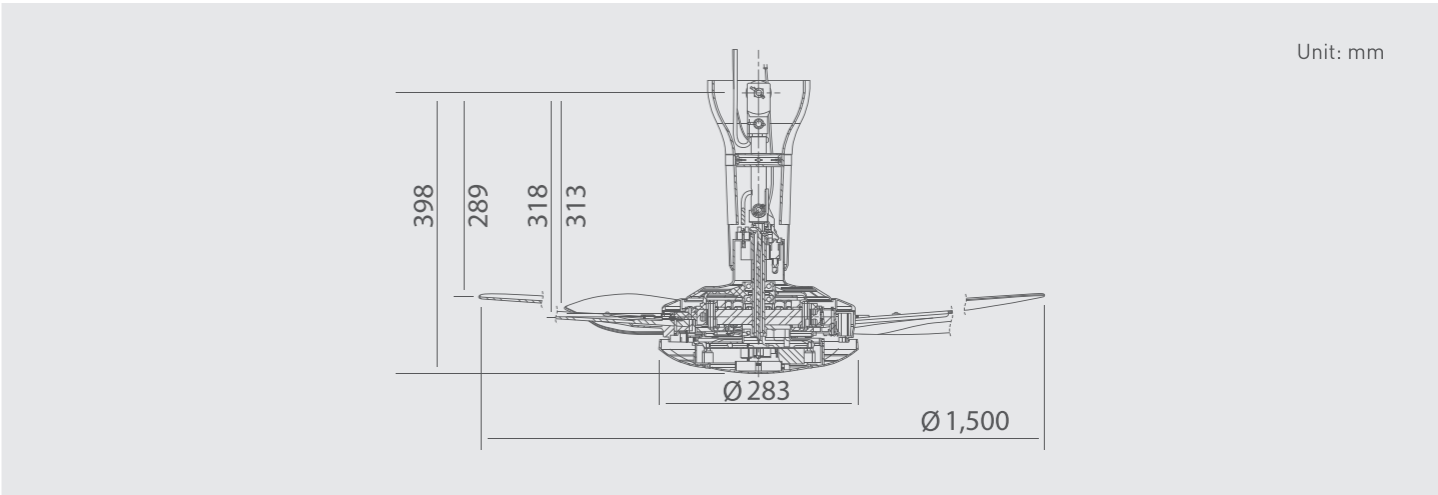

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
Z60WS	230	50	Hi	87	192	201	659	235	8299	8

*Hi - Notch 7

PRODUCT INFORMATION

Wireless Remote Control Type


M56SR 140cm(56")



Features

- Wireless remote control
- 3-speed control
- 1, 3, 6 hours timer
- Sleep mode
- Thermal fuse to prevent overheating or power surge
- Safety wire provided
- Cut-off safety switch equipped
- Fall prevention of blade adopted
- Permanently lubricated ball-bearing
- Color option: Platinum Silver or White

Dimensions

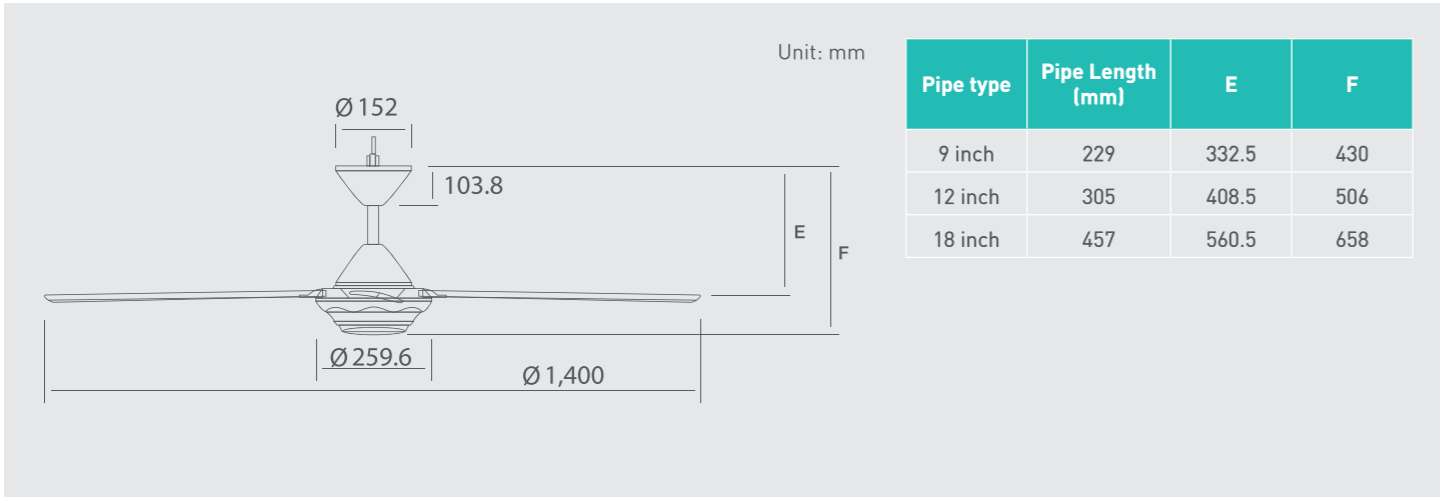

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
M56SR	230	50	Hi	64	190	155	509	192	6710	6.9

*Hi - Notch 3


R48SP 120cm(48")



Features

- Wireless remote control
- 3-speed control
- 1, 3, 6 hours timer
- Sleep mode
- PPG (PP reinforced with fibre glass) Blade material for durability
- Thermal fuse to prevent overheating or power surge
- Safety wire provided
- Cut-off safety switch equipped
- Fall prevention of blade adopted
- Permanently lubricated ball-bearing
- Color option: Silver or White

Dimensions

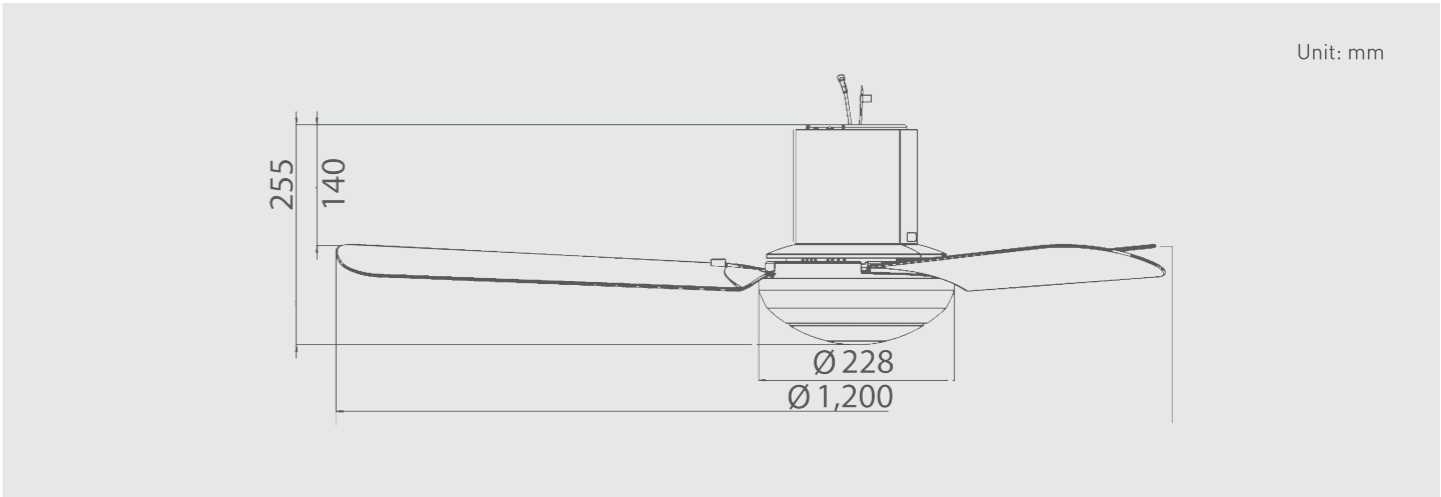

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
R48SP	230	50	Hi	60	237	175	574	170	6003	5.5

*Hi - Notch 3

PRODUCT INFORMATION

Regulator Control Type


M11SU 110cm(44")



Features

- Wireless remote control
- 3-speed control
- PPG (PP reinforced with fibre glass) Blade material for durability
- 1, 3, 6 hours timer
- Sleep mode
- Thermal fuse to prevent overheating or power surge
- Safety wire provided
- Cut-off safety switch equipped
- Fall prevention of blade adopted
- Permanently lubricated ball-bearing
- Color option: White or Silver

Dimensions

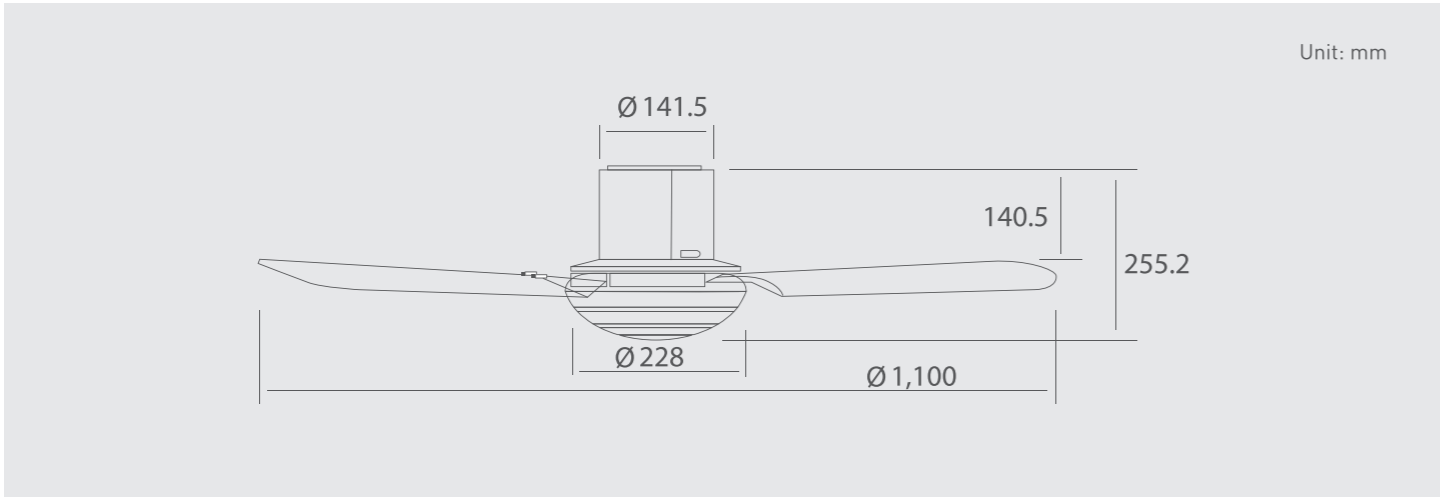

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
M11SU	230	50	Hi	54	220	190	623	160	5650	5.1

*Hi - Notch 3


M48SG 120cm(48")



Features

- Compact size condenser controlled regulator
- 5-speed selection
- Thermal fuse will cut off motor when motor overheat
- Safety wire provided
- Cut-off safety switch equipped
- Fall prevention of blade adopted
- Permanently lubricated ball-bearing assembly
- Color option: White or Black

Dimensions

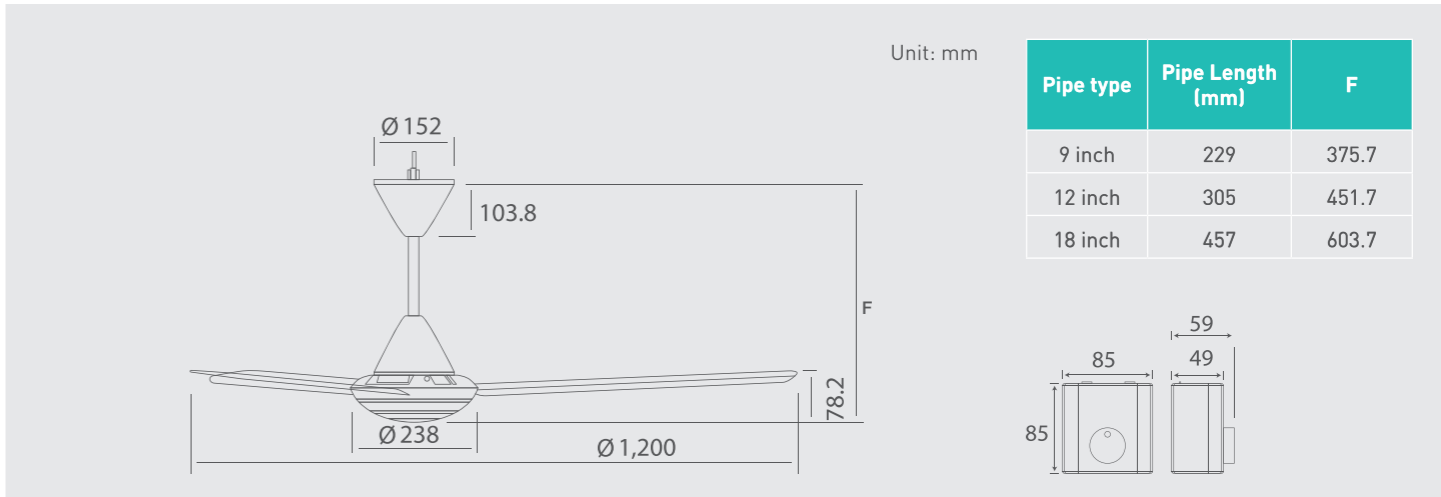

Specifications


Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
M48SG	230	50	Hi	49	296	165	541	170	5650	5.3

*Hi - Notch 5

PRODUCT INFORMATION

Regulator Control Type


M60SG 150cm(60")

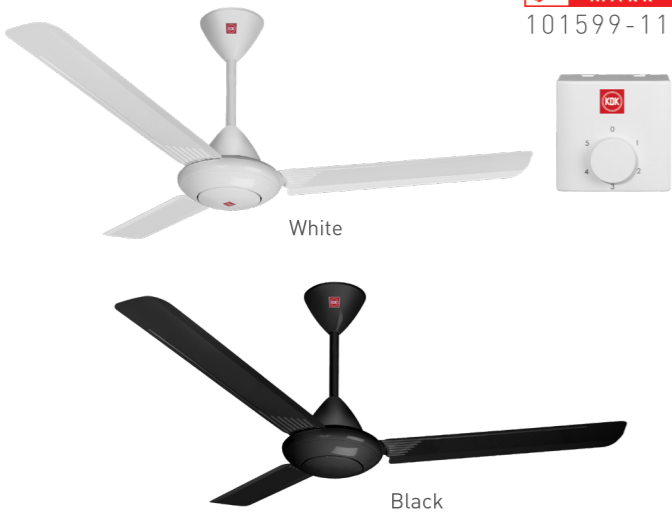

Features

- Compact size condenser controlled regulator
- 5-speed selection
- Thermal fuse will cut off motor when motor overheat
- Safety wire provided
- Cut-off safety switch equipped
- Fall prevention of blade adopted
- Permanently lubricated ball-bearing assembly
- Color option: White or Black

Dimensions

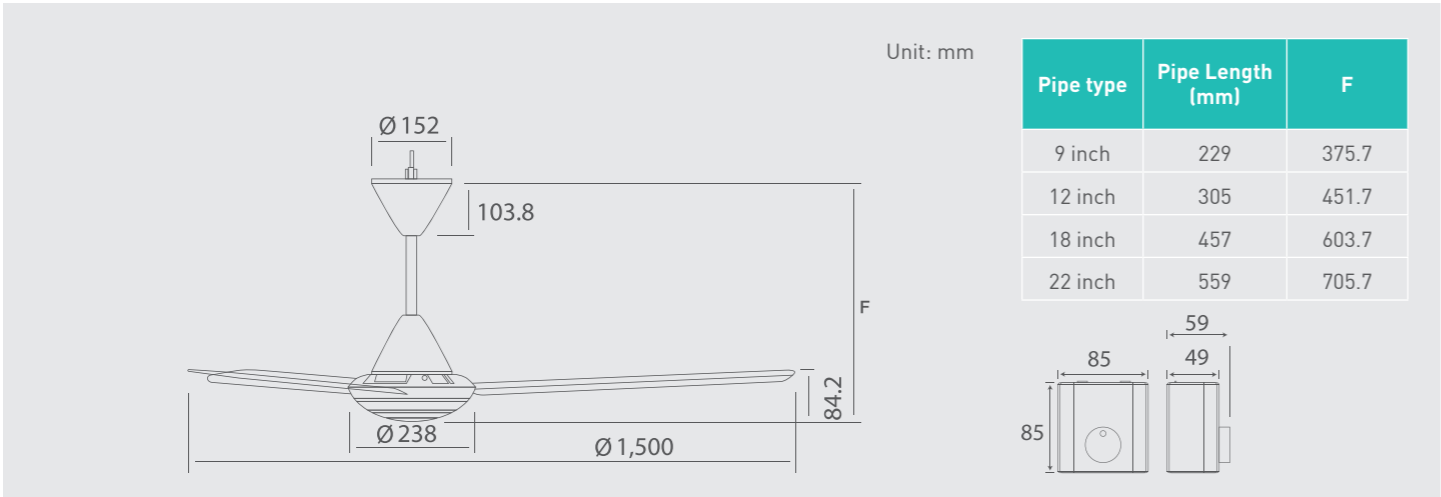

Specifications

Model No.	Voltage		*	Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
	[V]	[Hz]				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
M60SG	230	50	Hi	71	233	160	525	225	7945	5.7

*Hi - Notch 5

SPECIFICATION

Model No.		Consumption [W]	RPM [min ⁻¹]	Air Velocity		Air Delivery		Weight [kg]
				[m/min]	[ft/min]	[m³/min]	[ft³/min]	
Direct Current (DC) Motor, Mobile Control Type								
F40GP	Hi	50 (Fan+Light)	235	220	722	155	5474	5.2
E48GP	Hi	50 (Fan+Light)	170	185	607	200	7063	5.5
E48HP	Hi	31	170	185	607	200	7063	5.2
H56GP	Hi	72 (Fan+Light)	200	210	689	255	9005	6.8
Direct Current (DC) Motor, Wireless Remote Control Type								
W56WV	Hi	39	228	180	591	220	7769	4.9
U60FW	Hi	61 (Fan+Light)	230	205	673	240	8176	Short / Long 6.0 / 6.2
U48FP	Hi	45 (Fan+Light)	235	180	590	182	6427	4.9
T60AW	Hi	39	230	205	673	240	8476	5.3
Wireless Remote Control Type								
Z60WS	Hi	87	192	201	659	235	8299	8
M56SR	Hi	64	190	155	509	192	6710	6.9
R48SP	Hi	60	237	175	574	170	6003	5.5
M11SU	Hi	54	220	190	623	160	5650	5.1
Regulator Control Type								
M48SG	Hi	49	296	165	541	170	5650	5.3
M60SG	Hi	71	233	160	525	225	7945	5.7

Note: The value in Specification table are representative characteristics value at 230V, 50Hz

COMPARISON

Features	Mobile Control Type				Wireless Remote Control Type								Regulator Control Type	
	F40GP	E48GP	E48HP	H56GP	W56WV	U60FW	U48FP	T60AW	Z60WS	M56SR	R48SP	M11SU	M48SG	M60SG
Thermal Safety Fuse									✓	✓	✓	✓	✓	✓
Safety Wire	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Cut-off Safety Switch	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Fall Prevention of Blade	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Direct Current Motor	✓	✓	✓	✓	✓	✓	✓	✓						
Auto Mode (Thermal Sensor)								✓						
3D Blade	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		
PPG Material Blade					✓	✓	✓	✓	✓		✓	✓		
ABS-G Material Blade	✓	✓	✓	✓										
Sleep Mode	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
1/f Yuragi	✓	✓	✓	✓	✓	✓	✓	✓	✓					
Wi-Fi Connection	✓	✓	✓	✓										
Infrared Remote Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
LED Lighting	✓	✓		✓		✓	✓							

MOBILE CONTROL TYPE

Network Adaptor Specification	
Network Adaptor	Wi-Fi Module (built-in)
Model	DNSK-P11
Input Voltage	DC 5V (From Ceiling Fan Unit)
Current Consumption	Tx/Rx max. 290/100 mA
Wi-Fi Standard	IEEE 802.11 b/g/n
Frequency Range	2.4 GHz band
Encryption	WPA2-PSK (TKIP/AES)

Maximum ratio-frequency power transmitted in the frequency bands

Type of wireless	Frequency band	Max. EIPR (dBm)
WLAN	2412 – 2472 MHz	20 dBm



SINCE 1909
JAPAN

Sole Distributor:
Capital Distributors (S) Pte Ltd
18 Genting Rd,
Singapore 349477
Tel: (65) 6288 9190
Fax: (65) 6288 5869
E-mail: sales@capital.com.sg
Website: www.kdk.sg

KDK Company, Division of PES
4017, Takaki-cho, Kasugai, Aichi, Japan
<http://kdk.jp>

- Actual colors may vary slightly from shown.
- Specifications are subject to change without prior notice.

CATALOG NO.: K-SGCF006

03.24