


# T60AW



- Direct current (DC) motor adopted
- Auto mode with Eco Mode function by temperature sensor
- 1/f Yuragi function
- 3D blade delivers smooth and strong airflow
- PPG blade material for durability
- LCD wireless remote control
- 9-speed control
- Sleep mode with On timer & Off timer
- Equipped with safety device
- Blade safety plate and safety wire attached

## DIMENSION

Unit : mm

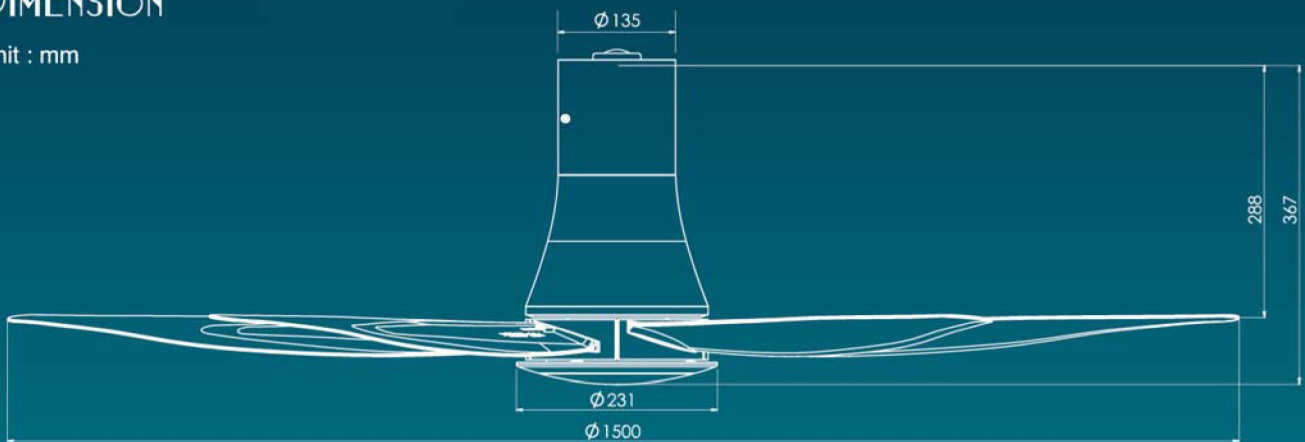

## SPECIFICATION

Model No.	Voltage [V]	*	Consumption [W]	R.P.M. [min <sup>-1</sup> ]	Air Velocity		Air Delivery		Weight [kg]
					[m/min]	[ft/min]	[m <sup>3</sup> /min]	[ft <sup>3</sup> /min]	
T60AW	220	Hi	37	228	200	656	235	8,299	5.1
		Lo	3	80	—	—	—	—	
	230	Hi	39	230	205	673	240	8,476	
		Lo	3	80	—	—	—	—	

\*Hi - Notch 9 / Lo- Notch 1